


650V60A 绝缘栅双极型晶体管


■ 特点/Features

- CoolWatt® II 沟槽栅场截止技术/CoolWatt® II Trench-FS technology
- 低饱和压降/Low V_{CEsat}
- 低动态损耗/Low switching losses
- 反并联快恢复二极管/With anti-parallel fast recovery diode
- 正温度系数/Positive temperature coefficient
- 高可靠性/High reliability



■ 应用领域/Applications

- 电源类/Power
- PV/光伏领域
- 工业焊机/Industrial welding

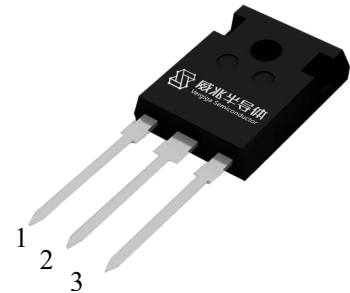

TO-247

型号/Part ID	V_{CE} (V)	I_{CNOM} (A)	$V_{CESAT@25^{\circ}C}$ (V)	封装/Package	丝印/Marking
HCKW60N65H2	650	60	1.88	TO-247	K60H652

■ 最大额定值/Maximum Rated Values

符号 Symbol	参数 Parameter	条件 Condition	值 Value	单位 Unit
V_{CES}	集电极-发射极电压 Collector-emitter voltage	$T_{vj}=25^{\circ}C$	650	V
I_C	集电极连续直流电流 DC collector current	$T_C = 25^{\circ}C$ $T_C = 100^{\circ}C$	120 60	A
I_{Cpuls}	集电极可重复脉冲电流 Pulse collector current	$T_{vj}\leq 150^{\circ}C$	180	A
V_{RRM}	二极管反向峰值电压 Repetitive peak reverse voltage	$T_{vj}=25^{\circ}C$	650	V
I_F	二极管连续直流电流 Diode continuous forward current	$T_C = 25^{\circ}C$ $T_C = 100^{\circ}C$	80 40	A
I_{Fpuls}	二极管可重复脉冲电流 Diode pulse current	$T_{vj}\leq 150^{\circ}C$	120	A

V_{GE}	栅极-发射极电压 Gate-emitter voltage	$T_{vj}=25^{\circ}C$	± 20	V
P_{tot}	总耗散功率 Power dissipation	$T_C = 25^{\circ}C$	428	W
T_{vj}	可工作结温 Operating junction temperature		-40~+ 175	$^{\circ}C$
T_{stg}	储存温度 Storage temperature		-50~ + 150	$^{\circ}C$
M	安装扭矩 Mounting torque	M3	0.6	Nm

■ 热特性/Thermal Characteristic

符号 Symbol	参数 Parameter	最大值 Maximum	单位 Unit
$R_{thJC-IGBT}$	IGBT 芯片到底板热阻 IGBT thermal resistance junction-case	0.35	K/W
$R_{thJC-FRD}$	二极管芯片到底板热阻 FRD thermal resistance junction-case	0.60	K/W
R_{thJA}	芯片结温到环境热阻 Thermal Resistance, Junction-to-Ambient	40	K/W

■ 电气特性/Electrical Characteristic

符号 Symbol	参数 Parameter	测试条件 Test conditions	值Value			单位 Unit
			最小 Min.	典型 Typ.	最大 Max.	
$V_{(BR)CES}$	集电极-发射极击穿电压 Collector-emitter breakdown voltage	$V_{GE} = 0V,$ $I_C=0.25mA, T_{vj}=25^{\circ}C$	650	—	—	V
$V_{CE(sat)}$	集电极-发射极饱和压降 Collector-emitter saturation voltage	$V_{GE}=15V, I_C=60A, T_{vj}=25^{\circ}C$	—	1.88	2.05	
$V_{GE(th)}$	门极开启阈值电压 Gate-emitter threshold voltage	$V_{GE}= V_{CE}, I_C=1.0mA, T_{vj}=25^{\circ}C$	5.00	5.65	6.25	
V_F	二极管正向导通压降 Diode forward voltage	$V_{GE}= 0V, I_F=40A, T_{vj}=25^{\circ}C$	—	1.85	2.3	
I_{GES}	门极-发射极漏电流 Zero collector voltage gate current	$V_{GE}=20V, V_{CE}=0V$	—	—	200	nA
I_{CES}	集电极-发射极漏电 Zero gate voltage collector current	$V_{CE} =650V, V_{GE}=0V, T_{vj}=25^{\circ}C$	—	—	500	μA
R_{Gin}	内部门极电阻 Integrated gate resistor	—	—	0	—	Ω
C_{ies}	输入电容 Input capacitance	$V_{GE} = 0V, V_{CE}= 30V,$	—	3830	—	pF





C_{oes}	输出电容 Output capacitance	$f = 1\text{MHz}, T_{vj}=25^{\circ}\text{C}$	—	181	—	
C_{res}	反向传输电容 Reverse transfer capacitance		—	38	—	
Q_g	门极电量 Gate charge	$V_{CC}=400\text{V}, I_C=60\text{A}, V_{GE}=0/15\text{V},$ $T_{vj}=25^{\circ}\text{C}$	—	115	—	nC


■ 动态特性/Dynamic Characteristic (With inductive load)

符号 Symbol	参数 Parameter	测试条件 Test conditions	值Value			单位 Unit
			最小 Min.	典型 Typ.	最大 Max.	
IGBT 特性_25°C/IGBT Characteristic_25°C:						
$T_{d(on)}$	开启延迟时间 Turn-on delay time	$V_{CC}=400\text{V}, I_C=60\text{A},$ $R_g=20\ \Omega, C_{ge}=0\text{nF}, V_{GE}=0/15\text{V},$ $L_{load}=60\ \mu\text{H}, T_{vj}=25^{\circ}\text{C}$	—	74	—	ns
T_r	上升时间 Rise time		—	91	—	
$T_{d(off)}$	关闭延迟时间 Turn-off delay time		—	157	—	
t_f	下降时间 Fall time		—	62	—	
E_{on}	单次开启损耗 Turn-on energy		—	1.81	—	mJ
E_{off}	单次关闭损耗 Turn-off energy		—	1.59	—	
E_{total}	单脉冲总损耗 Total switch energy		—	3.40	—	
IGBT 特性_150°C/IGBT Characteristic_150°C:						
$T_{d(on)}$	开启延迟时间 Turn-on delay time	$V_{CC}=400\text{V}, I_C=60\text{A},$ $R_g=20\ \Omega, C_{ge}=0\text{nF}, V_{GE}=0/15\text{V},$ $L_{load}=60\ \mu\text{H}, T_{vj}=150^{\circ}\text{C}$	—	86	—	ns
T_r	上升时间 Rise time		—	110	—	
$T_{d(off)}$	关闭延迟时间 Turn-off delay time		—	259	—	
t_f	下降时间 Fall time		—	72	—	
E_{on}	单次开启损耗 Turn-on energy		—	3.11	—	mJ
E_{off}	单次关闭损耗 Turn-off energy		—	2.12	—	
E_{total}	单脉冲总损耗 Total switch energy		—	5.23	—	
二极管特性_25°C/Diode Characteristic_25°C:						
E_{rec}	反向恢复损耗 Reverse recovery energy	$I_F = 60\text{A}, V_R=400\text{V},$ $V_{GE} = 0/15\ \text{V}, R_{ON}=20\ \Omega, T_{vj}=25^{\circ}\text{C}$	—	200	—	μJ
t_{rr}	二极管反向恢复时间 Diode reverse recovery time		—	118	—	nS
Q_{rr}	二极管反向恢复电量 Diode reverse recovery charge		—	718	—	nC
I_{rrm}	反向恢复峰值电流 Diode peak reverse recovery current		—	11	—	A
di_{rr}/dt	恢复下降电流最大电流变化率 Recovery current during t_{rr}		—	199	—	A/ μS
二极管特性_150°C/Diode Characteristic_150°C:						
E_{rec}	反向恢复损耗 Reverse recovery energy	$I_F = 60\text{A}, V_R=400\text{V},$ $V_{GE} = 0/15\ \text{V},$	—	480	—	μJ


trr	二极管反向恢复时间 Diode reverse recovery time	R _{ON} =20 Ω, T _{vj} =150°C	—	193	—	nS
	二极管反向恢复电量 Diode reverse recovery charge		—	2025	—	nC
Irrm	反向恢复峰值电流 Diode peak reverse recovery current		—	18.7	—	A
di _r /dt	恢复下降电流最大电流变化率 Diode peak rate of fall of reverse Recovery current during t _r		—	188	—	A/uS

■ 特征曲线/ Characteristic Curve

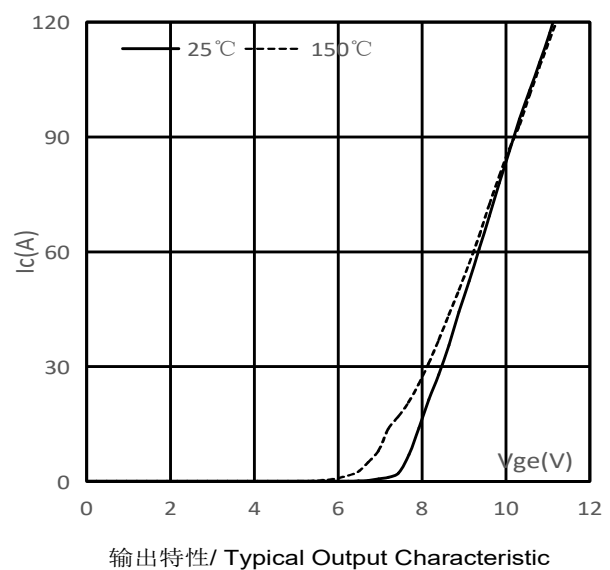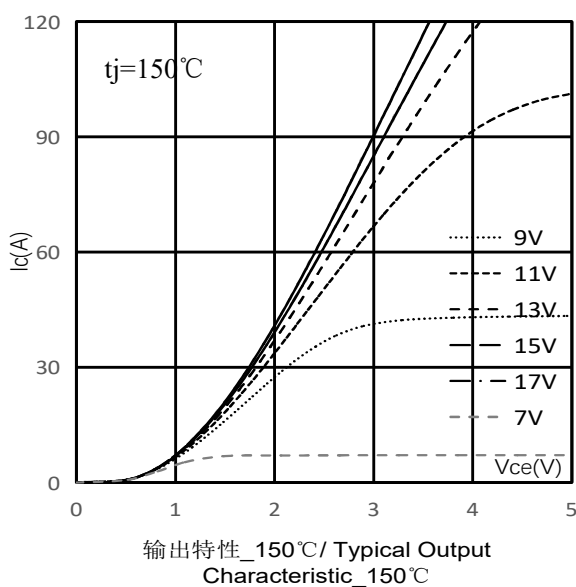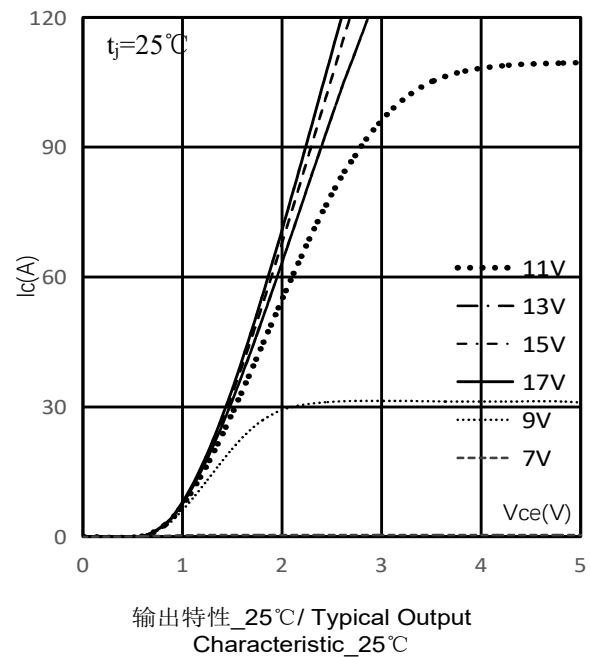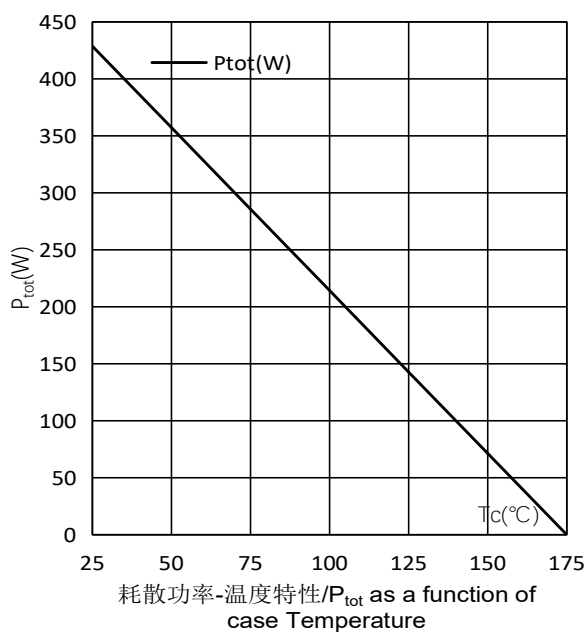


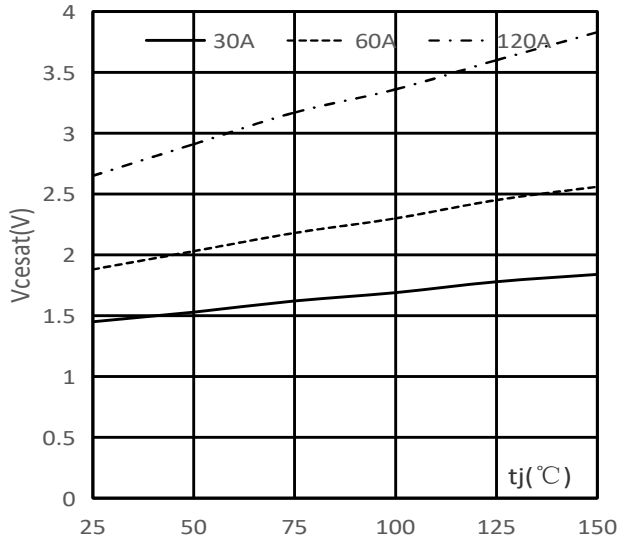


饱和压降-温度特性/ V_{cesat} as a function

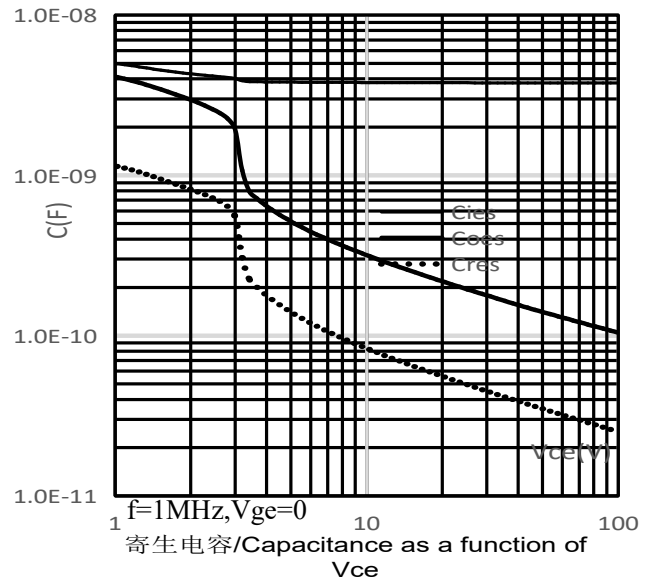


寄生电容/Capacitance as a function of V_{ce}

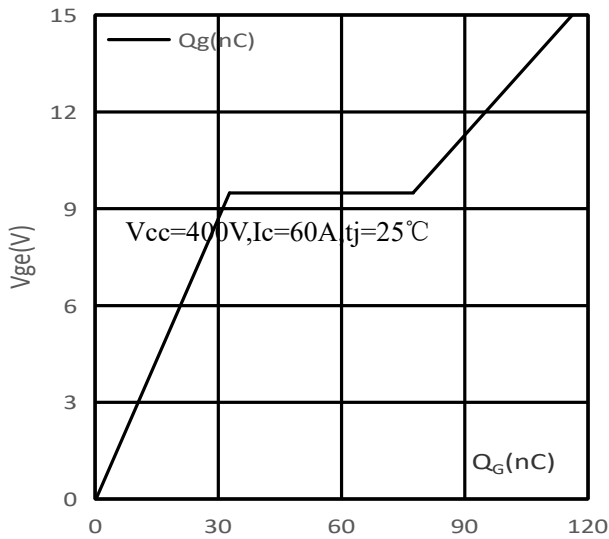


门极电量/Typical gate charge

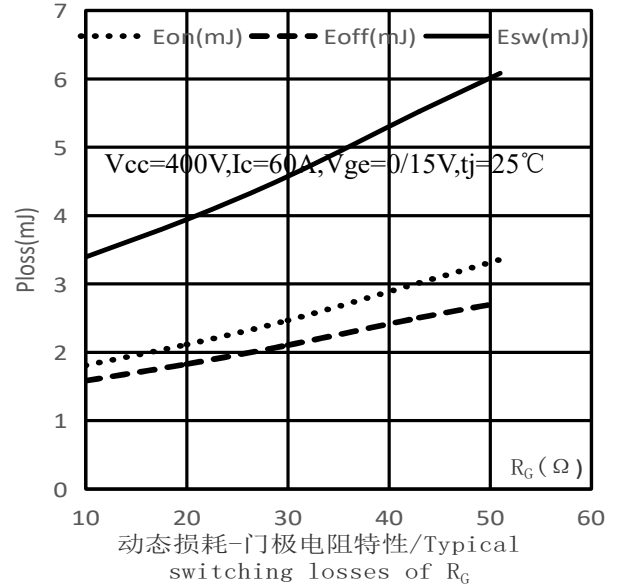







动态损耗-门极电阻特性/Typical switching losses of R_G






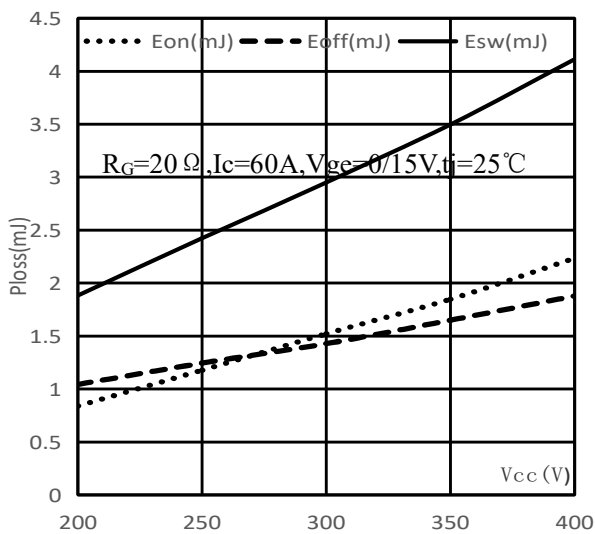


动态损耗-电压特性/Typical switching losses of V_{cc}

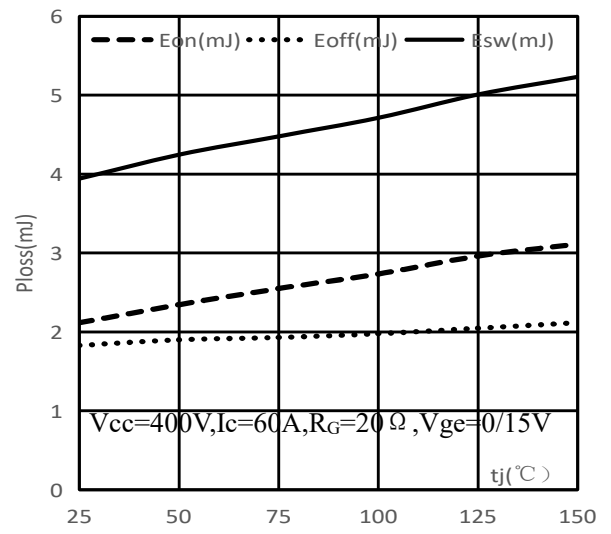


动态损耗-温度特性/Typical switching losses of t_j

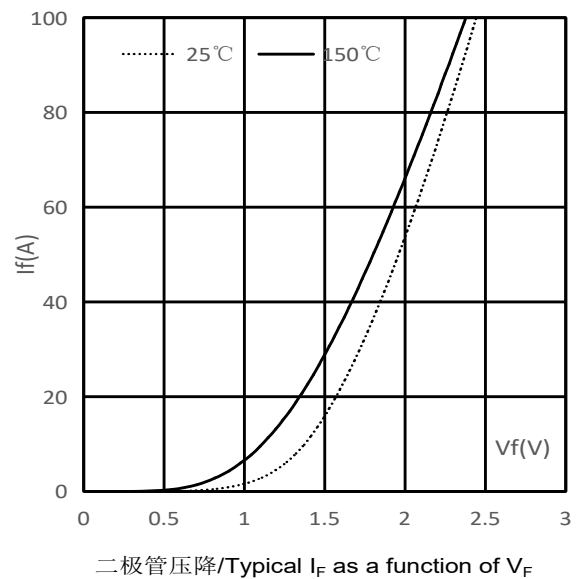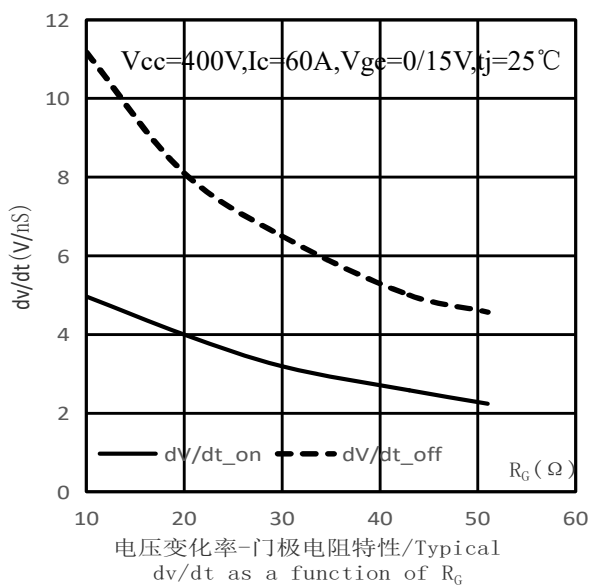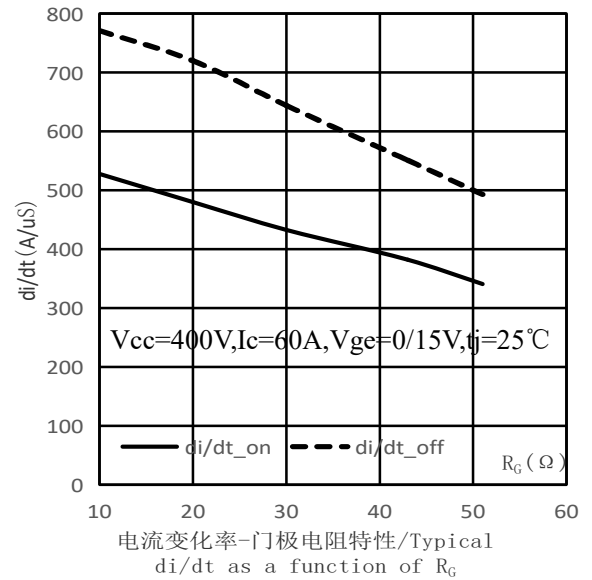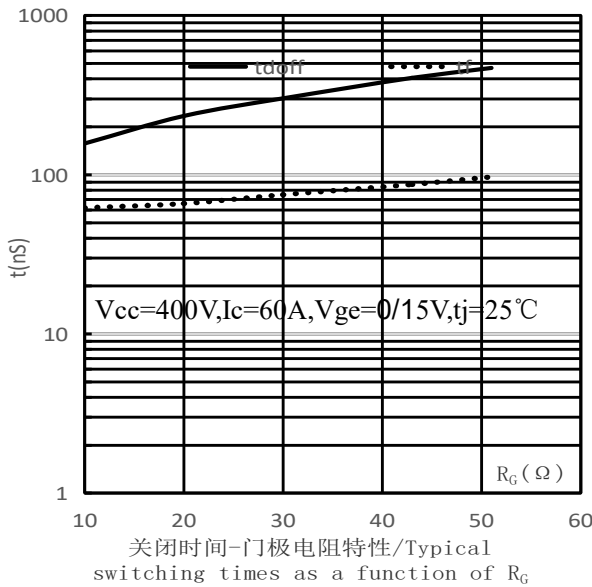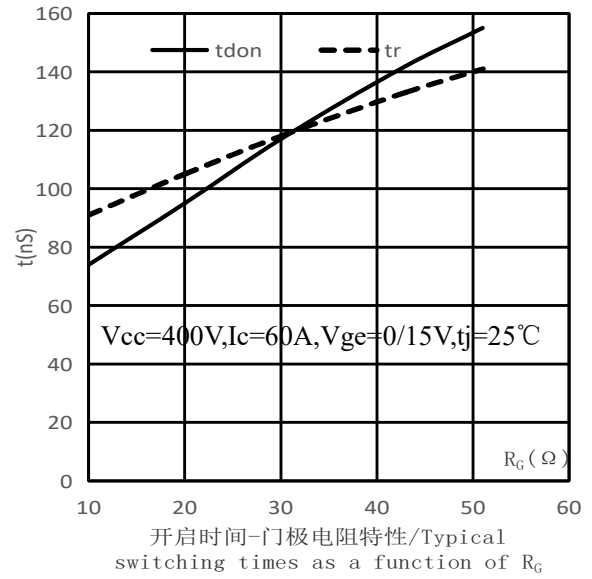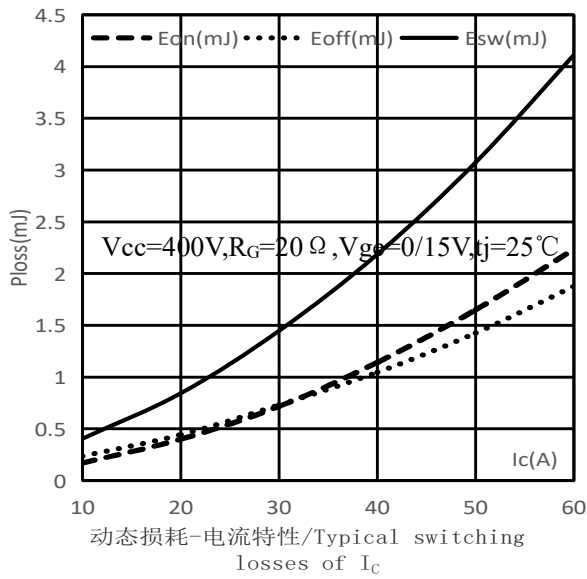


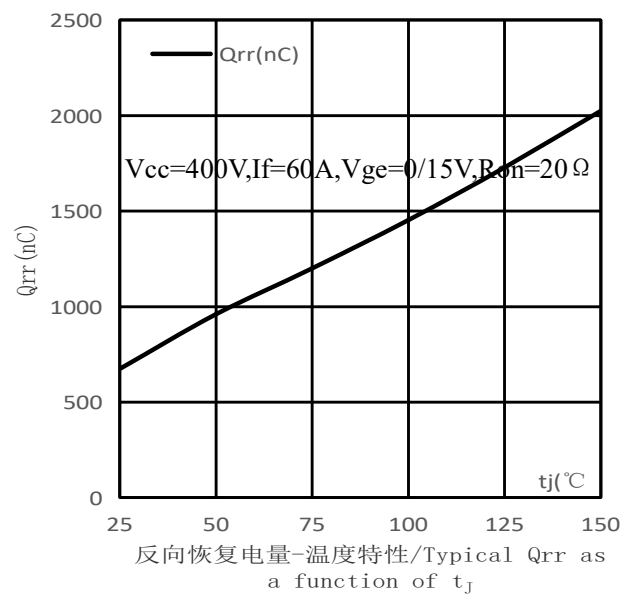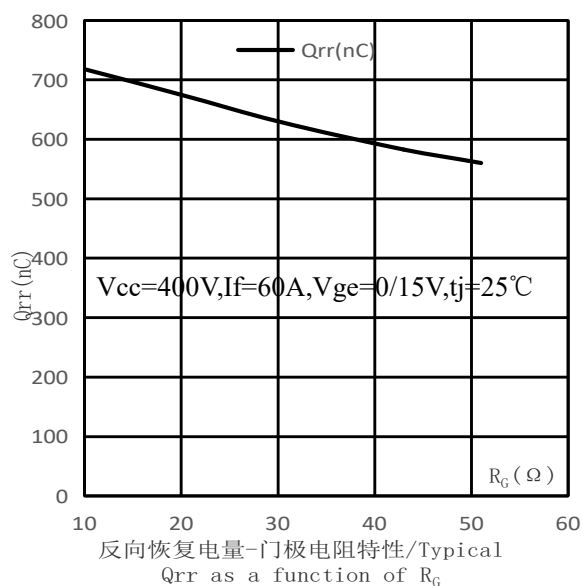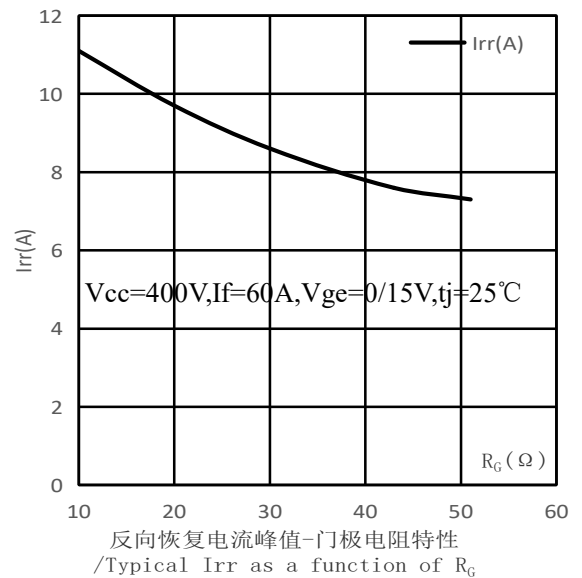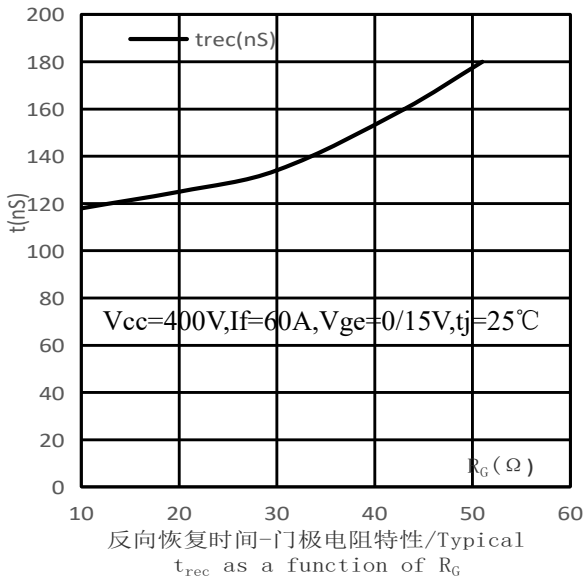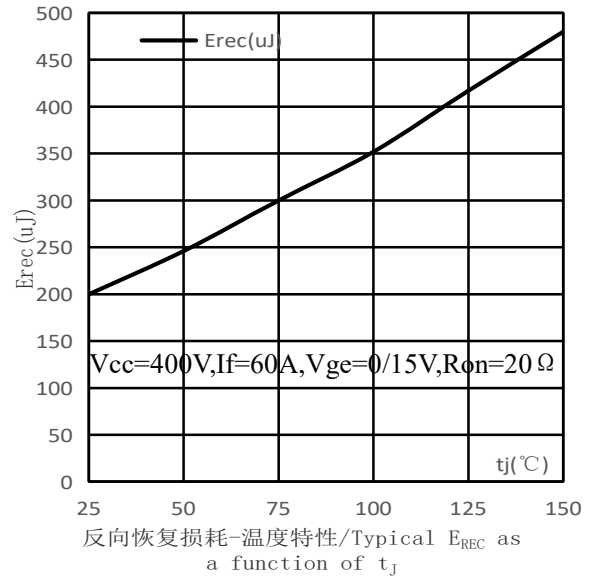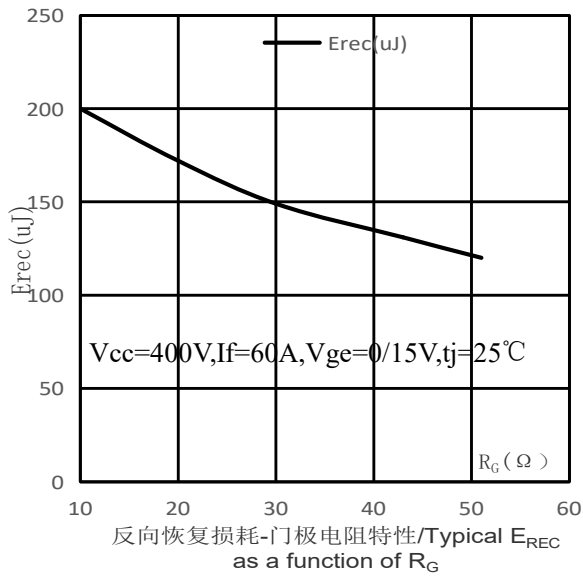

■ 丝印信息/Marking Information

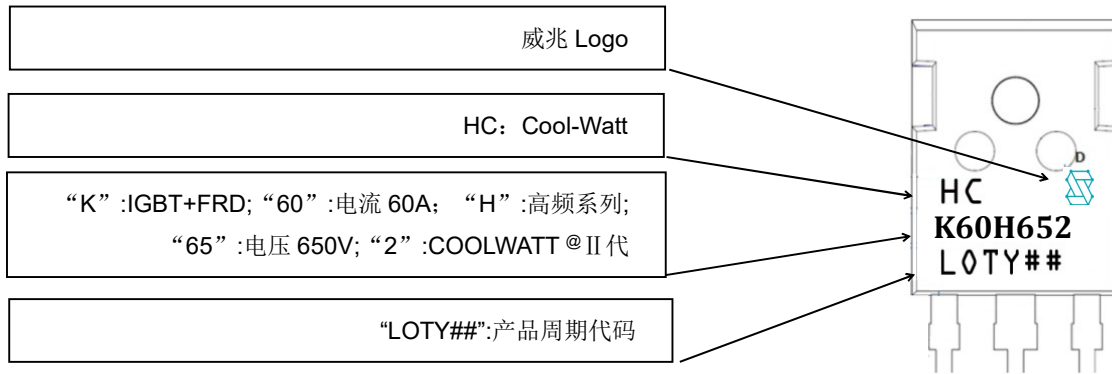

■ To-247 尺寸数据/TO-247 Package Outline Data

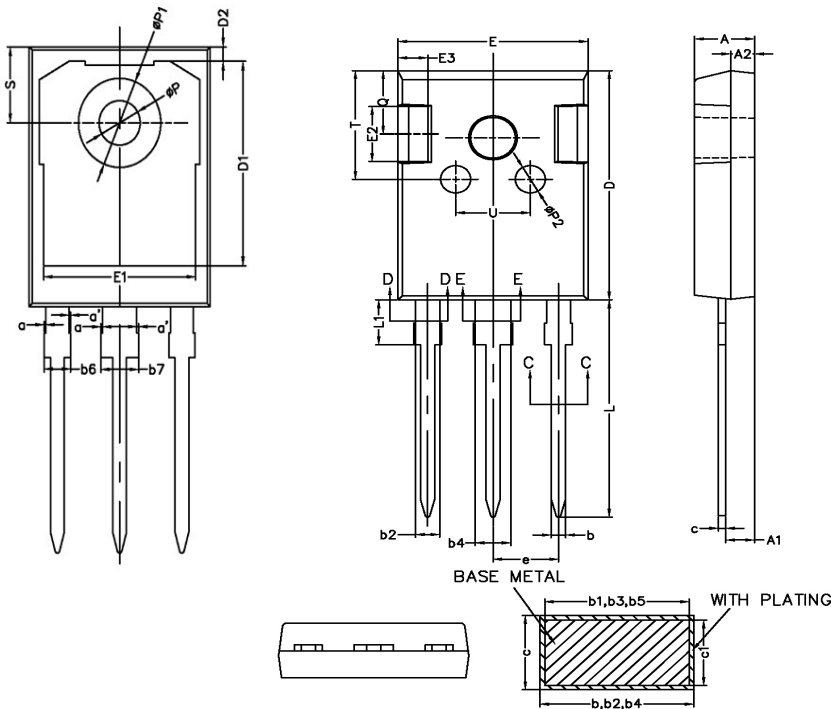

单位:mm/Unit:mm

SYMBOL	MIN	NOM	MAX
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
a	0	—	0.15
a'	0	—	0.15
b	1.16	—	1.26
b1	1.15	1.2	1.22
b2	1.96	—	2.06
b3	1.95	2.00	2.02
b4	2.96	—	3.06
b5	2.95	3.00	3.02
b6	—	—	2.25
b7	—	—	3.25
c	0.59	—	0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.20	1.35
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	4.90	5.00	5.10
E3	2.40	2.50	2.60
e	5.34	5.44	5.54
L	19.80	19.92	20.10
L1	—	—	4.30
P	3.50	3.60	3.70
P1	—	—	7.40
P2	2.40	2.50	2.60
Q	5.60	—	6.00
S	6.05	6.15	6.25
T	9.80	—	10.20
U	6.00	—	6.40